



### *FOR A500 USERS*

How To Select The 1st ROM	Location	Pin #
Holding Down LEFT Mouse Button While Re-botting	CIA (U7)	8
Holding Down RIGHT Mouse Button While Re-booting	PAULA (U3)	33
Holding Down Joy Stick Fire Button While Re-booting	CIA (U7)	9
Holding Down LEFT SHIFT Key While Re-booting	IC6570-036	25
Holding Down RIGHT SHIFT Key While Re-booting	IC6570-036	29
Holding Down LEFT ALT Key While Re-booting	IC6570-036	24
Holding Down RIGHT ALT Key While Re-booting	IC6570-036	28

**Note :** The IC6570-036 is the keyboard processor on the A500 keyboard assembly.

### *FOR A2000/A2500 USERS*

How To Select The 1st ROM	Location	Pin #
Holding Down LEFT Mouse Button While Re-booting	CIA (U300)	8
Holding Down RIGHT Mouse Button While Re-booting	PAULA (U200)	33
Holding Down Joy Stick Fire Button While Re-booting	CIA (U300)	9

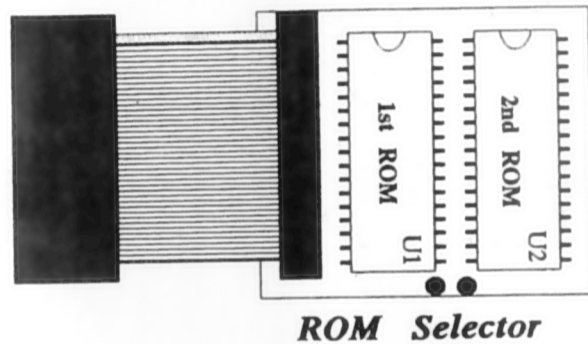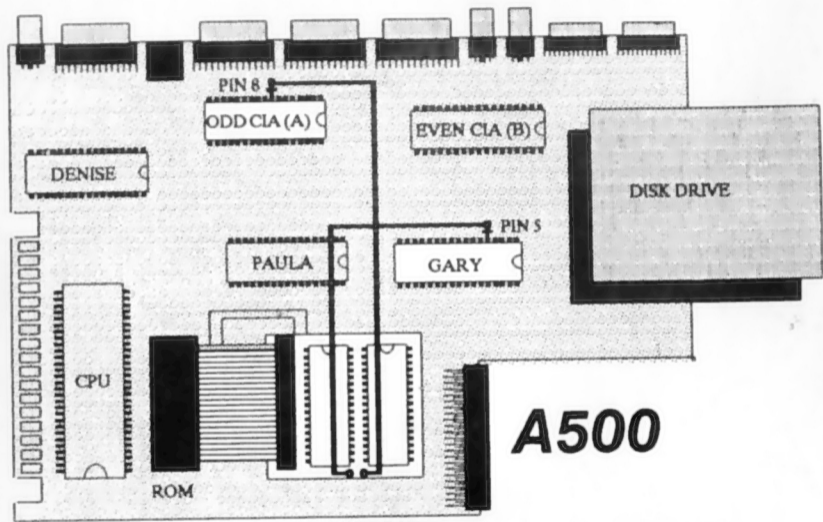

U1 : 1st ROM  
 U2 : 2nd ROM

Default Boot From,  
 U2 (2nd ROM)

